



ALL FOR SHOPS AND WAREHOUSES

VVN

## Wheel loaders

Easy maintenance & outstanding after-sales services  
Complete line of applications and accessories  
Pilot control system, automatic leveling



### Models described in the catalog:

VVN WL 42

VVN WL2 42

VVN WL 43

VVN WL 55

VVN WL 56

VVN WL 65

VVN WL 100

VVN WL 111

VVN WL2 111

VVN WL3 111

VVN WL4 111

VVN WL 112

VVN WL 113

VVN WL 115

VVN WL 116

VVN WL 117

VVN WL2 117

VVN WL3 117

VVN WL4 117

VVN WL5 117

VVN WL6 117

VVN WL 118



VVN WL 200

VVN WL 201

VVN WL2 201

# VVN WL 65

## overall specifications

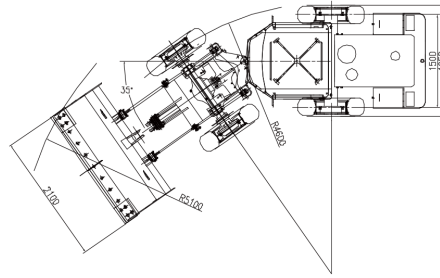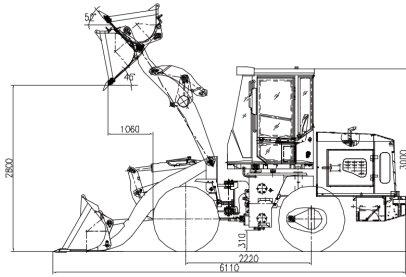

### Overall Data

Bucket Capacity (m <sup>3</sup> )	1.2	
Rated Payload (kg)	2300	
Operating Weight (kg)	6500	
Traction Force (kN)	58	
Breakout Force (kN)	68	
<b>Travel speeds (km/h):</b>		
	I	II
Forward	8.8	24.8
Reverse	8.5	24.8

### Engine YTO LR4B3-24

Rated Power (kW/rpm)	65/2400	
Rated Torque (Nm/rpm)	292-305/1400-1600	
Starting Voltage (V)	24	

### Drive Train

Torque Converter	Single-stage, Single-turbine, 3-element	
Torque Ratio	3.7	
Transmission	Fixed Shaft Hydraulic Shift Spur Gear	
Gear	2F/2R	
Pressure of Transmission (MPa)	1.2-1.5	
Main Reducer	Spiral Bevel Gear Single-stage Reduction	
Final Reducer	Planetary Reduction	
Tire	16/70-20	

### Brake System

Service Brake	Air Drive, Four Wheel Brake (Dry)	
Setting Pressure (MPa)	0.78	
Parking & Emergency Brake	Flexible Shaft Controlled Caliper	

### Standard

Shantui Transmission  
Feicheng Axle  
Standard Bucket

### Optional

Log Grapple (J)  
Light-duty Grapple (ZZ)

### Steering System

Type	Hydraulic Load Sensor System	
Cylinders-BorexStroke (mm)	2-63X280	
Steering Pump	Shared With Working Pump	
System Pressure (MPa)	14	
Steering Angle	±35°	

### Hydraulic System

Lift Cylinders-BorexStroke (mm)	2-100X718	
Tilt Cylinder-BorexStroke(mm)	1-110X494	
Working Pump	Gear Pump	
Flow Rate (L/min/rpm)	151/2400	
System Pressure (MPa)	16	

### Hydraulic Cycle Time, Rated Load in Bucket (In Second):

Raise (Loaded)	Dump	Lower (Empty)	Total
5.6	1.3	3.7	10.6

### Electrical System

System Voltage (V)	24	
Battery (2 in series) (Ah)	180	
Lamp Voltage (V)	24	

### Service Refill Capacity

Fuel Tank (L)	110	
Hydraulic Tank (L)	100	
Transmission (L)	18	
Front Axle (L) / Rear Axle (L)	12/12	

### Air Conditioning System (Optional)

Heating Capacity (W)	5800 (±10%)	
Cooling Capacity (W)	4500 (±10%)	



ALL FOR SHOPS AND WAREHOUSES

#### LATVIA

SIA "Viss Veikaliem un Noliktavām"  
41A - 224 Kan davas street, Rīga, LV-10 83  
Phone: +371 27727449 ( latvian, english),  
+371 22074120 (l atvian, russian, english),  
+371 20330002 (latvian, russian, english)  
E-mail: info@vvn.lv

www.vvn.lv

#### LITHUANIA

Phone: +370 70066080  
E-mail: info@vvn.lt  
www.vvn.lt

#### NORWAY

Phone: +47 219558 68  
E-mail: info@vvn.no  
www.vvn.no

#### ESTONIA

Phone: +372 634633 2,  
+372 63463 42  
E-mail: info@vvn.ee  
www.vvn.ee

#### DENMARK

E-mail: info@vvn.dk  
www.vvn.dk

#### FINLAND

Phone: +358 7532633 23  
E-mail: info@vvn.fi  
www.vvn.fi

#### RUSSIA

Phone: +7 849960925 1 5  
E-mail: info@vvn.ru  
www.vvn.ru

#### SWEDEN

Phone: +46 107502388  
E-mail: info@vvn.se  
www.vvn.se

#### BELARUS

Phone: +375 849960925 1 5  
E-mail: info@vvn.by  
www.vvn.by